


ULTRA PLANK

Code: EWD145X10D

Combines durashield protection with larger dimensions, enabling premium architectural features that demand both strength and refined aesthetics.

Suitable For: Gates, interior and exterior wall & ceiling cladding, railings, louvers, partitions, sunscreens, fencing, duct & chute coverings, compound wall extensions & landscaping.

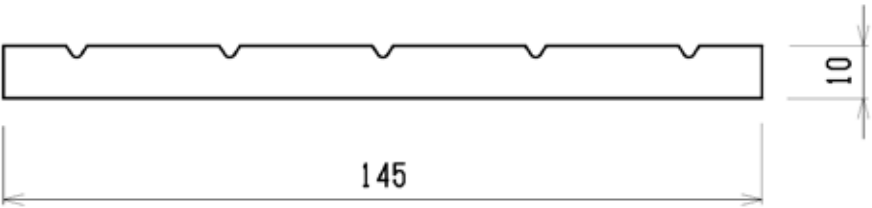

AVAILABLE COLOURS



TEAK SUPREME



REDWOOD



IPE



SILVERWOOD

TECHNICAL SPECIFICATIONS

Series	Name	Surface	Length(mm)	Width(mm)	Thickness(mm)	Wt/No (Kg)	Area/Pc(Sq.ft)	PCS/Pack
Planks	Ultra	Brushed	2440	145	10	4.90	3.80	5

*Digital representation of the product & colour is limited and will vary from the actual product in colour and texture.

COMPARE EVERWOOD ULTRA PLANKS

Characteristics	EVERWOOD Ultra Planks	High Pressure Laminates	Cement Fiber Planks	Natural Wood
Wood Aesthetic Appeal	Premium wood colours, grain & textures	Printed surface, unnatural, flat, synthetic finish	Unnatural, painted, coated finish with low budget appeal	Natural wood appeal, not long lasting in exteriors
Weathering Resistance	Exceptionally high, 100% moisture & rot proof	Vulnerable to swelling & delamination	Surface coating susceptible to peeling	Very low requiring regular coating
UV & Fade Resistance	Superior UV & colour fade resistant	Tends to fade & discolour over time	Surface coating changes colour over time	Highly vulnerable & discolours with UV exposure
Colour & Finish Retention Capability	Extraordinarily resilient, high color stability	Low colour & finish retention, tends to dull out	Requires repeated painting to retain colour & finish	Needs periodic PU coating to retain colour & finish
Scratch & Impact Resistance	Very high resistance to scratches & impact	Lamination scratches easily, material dents under impact	Highly brittle under impact, coating scratches easily, requiring repair	Easily susceptible to scratches, cracks with impact
Maintenance, Painting & Coating	Cleans easily with water, no other care required	Requires periodic edge sealing & care	Requires regular painting to stay looking good	Requires lifelong & regular coating, termite treatment
Outdoor Lifespan	30 years	8-10 years on average	6-8 years on average	Depends on frequency of maintenance
Sustainability	From recycled polymers & eco-safe materials, recyclable	Resin based, not recyclable	Cement based, toxic and environmentally unfriendly	Un-sustainable, uses toxic solvents & surface coatings
Longevity & ROI	Exceptionally long lasting without any lifetime maintenance costs	Shorter lifecycle, has upkeep costs through time	Low cost investment carrying high lifetime maintenance costs	High investment, high maintenance costs to keep looking good

Feature	EVERWOOD Ultra Plank	Standard WPC
Technology	Co-extrusion	Monolithic
Surface Finish	Shield core with deep feel wood grain	Embossed grain
Colour Retention	Excellent	Good
Fade Resistance	Highly enhanced	Good
Maintenance	Exceptionally low	Low
Ideal For	Premium tier projects	Mid tier projects

ADVANTAGES

- Low-maintenance surface technology
- 50% higher durability
- Water Proof
- Fade Resistance
- Natural Wood Appeal

CERTIFICATIONS



CONTACT US